




ABOUT US

Adwin Innovations Private Limited is a Joint Venture and collaboration between accomplished technocrat Mandeep Singh Bhatia and businessman Rishabh Gupta who is also one of the Directors of the Unique Group. Adwin Innovations is amongst the few service providers in the lighting industry, and also the manufacturers of one of a kind LED products, that can be recycled even after their expiry at minimum costs. Our goal since the very beginning has been to create customer experiences that primarily emphasizes on the convenience of our customers, while we also aim to ensure social responsibility and smart practices that comply with environmental needs.

UNIQUE GROUP

The Unique Group has been in business for over 25 years, they stepped into a variety of fields, especially the manufacturing of plywood, laminates, Batteries, particle board and MDF. Since its establishment in 1995, the Unique Group has seen a yearly exponential growth.

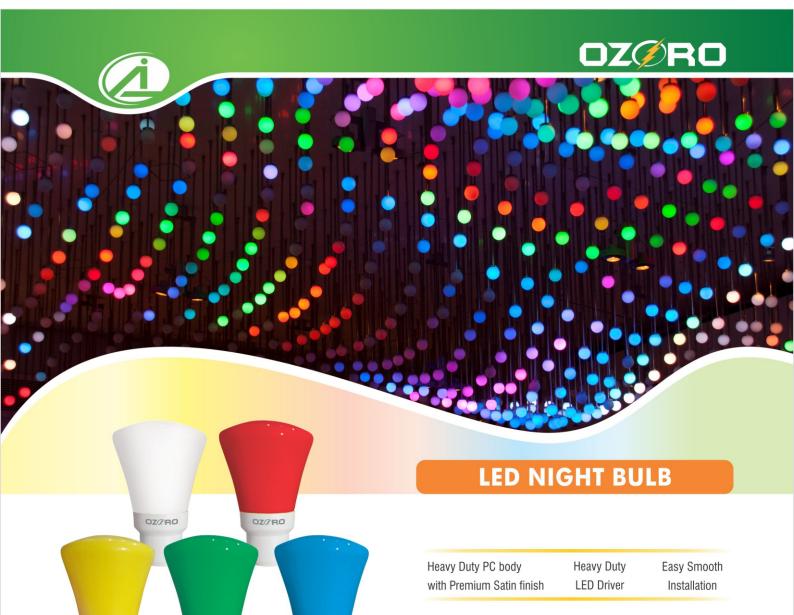

Model No.	Wattage	Lumens	Master Pack
BL-0.5	0.5 W	50	50 Pcs.

OZØRO

Specification		
Colour Temperature	Red/Blue/Green/	
	Yellow/White	
Power Factor	>0.50	
Input Voltage	AC 90 - 400 V	
Base Type	B22d	
Ingress Protection (IP)	IP20	



OZØRO









OZØRO







Heavy Duty AL body with Premium Satin finish

Heavy Duty LED Driver Easy Smooth Installation

Model No.	Wattage	Lumens	Master Pack
BL-7	7 W	770	50 Pcs.
BL-9	9 W	990	50 Pcs.
BL-12	12 W	1320	50 Pcs.
BL-15	15 W	1650	50 Pcs.
BL-18	18 W	1980	25 Pcs.
BL-23	23 W	2530	25 Pcs.

Specification			
Colour Temperature	6500K/4000K/3000K		
Power Factor	>0.90		
Surge Protection	4KV Surge		
Input Voltage	AC 90 - 400 V		
Base Type	B22d/E27		
Colour Rendering Index (CRI)	> 80		
Total Harmonic Distortion (THD)	<20%		
Ingress Protection (IP)	IP20		





OZØRO









Latest Design

Energy Saving

High Brightness

Life more than 35000 Hrs.








Heavy Duty AL body with Premium Satin finish **Heavy Duty** LED Driver

Easy Smooth Installation



Specification		
Colour Temperature	6500K/4000K/3000K	
Power Factor	>0.90	
Surge Protection	4KV Surge	
Input Voltage	AC 90 - 400 V	
Base Type	B22d/E27	
Colour Rendering Index (CRI)	> 80	
Total Harmonic Distortion (THD)	<20%	
Ingress Protection (IP)	IP20	



















Model No. Wattage Lumens **Master Pack** IB-10 10 W 1000 50 Pcs

LED INVERTER BULB

High Power Backup upto 4 Hrs.

Powerful Lithium Battery 2200 mAH

Long Battery** Life 500+ charging cycle

Generator & Inverter Compatible

Specification		
Colour Temperature	6500K	
Power Factor	>0.90	
Surge Protection	4KV Surge	
Input Voltage	AC 90 - 400 V	
Base Type	B22d	
Colour Rendering Index (CRI)	> 80	
Total Harmonic Distortion (THD)	<20%	
Ingress Protection (IP)	IP20	













*Bulb has warranty of 2 years **Battery has warranty of 1 year.



LED TUBELIGHT (T5)



Heavy Duty PC body	Heavy Duty	Easy Smooth
with Premium Satin finish	LED Driver	Installation

Model No.	Wattage	Lumens	Feet
TL-5	5 W	550	1 Ft.
TL-10	10 W	1100	2 Ft.
TL-20	20 W	2200	4 Ft.

Specification		
Colour Temperature 6500K / 4000K / 3		
Power Factor >0.95		
Surge Protection	4KV Surge	
Input Voltage	AC 90 - 400 V	
Base Type	Wall / Ceiling Mount	
Colour Rendering Index (CRI)	> 80	
Total Harmonic Distortion (THD)	<20%	
Ingress Protection (IP)	IP40	













Latest Design | En

Energy Saving

High Brightness

Life more than 50000 Hrs.




Model No.	Wattage	Lumens	Feet
TL-24	24 W	2640	4 Ft.
TL-36	36 W	3960	4 Ft.

Heavy Duty AL body Heavy Duty Easy Smooth with Premium Satin finish LED Driver Installation



SENSOR TUBELIGHT (T8)

Model No.	Wattage	Lumens	Feet	
TL-20S	20 W	2200	4 Ft.	

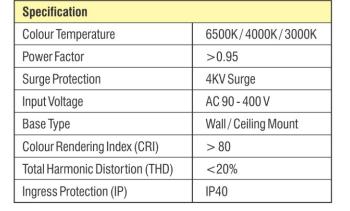











HEALTHCARE



Latest Design | Energy Saving

High Brightness

Life more than 50000 Hrs.





LED CONCEAL LIGHT



Model No.	Wattage	Lumens	Housing
CL-3	3 W	300	PC Body
CL-5	5 W	500	PC Body
CL-7	7 W	700	AL Body

Heavy Duty AL/PC body **Heavy Duty** Easy Smooth with Premium Satin finish LED Driver Installation

Specification	
Colour Temperature	6500K/4000K/3000K
	/Red/Blue/Green
Power Factor	>0.90
Surge Protection	2.5KV Surge
Input Voltage	AC 90 - 400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	<15%
Ingress Protection (IP)	IP20













Latest Design Energy Saving

High Brightness

Life more than 50000 Hrs.



LED DOWNLIGHTER - SMD(PC)



Model No.	Wattage	Cut Size	Lumens
DL-3 PC	3 W	2.5"	330
DL-6 PC	6 W	4"	660
DL-12 PC	12 W	6"	1320
DL-15 PC	15 W	6"	1650
DL-18 PC	18 W	8"	1980
DL-22 PC	22 W	8"	2420

Heavy Duty PC body Heavy Duty Easy Smooth with Premium Satin finish LED Driver Installation

Specification	
Colour Temperature	6500K/4000K/3000K
Power Factor	>0.95
Surge Protection	2.5KV Surge
Input Voltage	AC 90 - 400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	<15%
Ingress Protection (IP)	IP40
Design	Round/Square













Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs.



LED DOWNLIGHTER - Surface Panel(PC)



Model No.	Wattage	Cut Size	Lumens
DL-6 AL-S	6 W	4"	660
DL-12 AL-S	12 W	6"	1320
DL-18 AL-S	18 W	8"	1980

Heavy Duty PC body Heavy Duty Easy Smooth with Premium Satin finish LED Driver Installation

Specification	
Colour Temperature	6500K/4000K/3000K
Power Factor	>0.95
Surge Protection	2.5KV Surge
Input Voltage	AC 90 - 400 V
Base Type	Surface
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	<15%
Ingress Protection (IP)	IP40
Design	Round/Square













Latest Design | Energy Saving | High Brightness |

Life more than 50000 Hrs. 90% Driver Efficiency





LED SPOT LAMP



Model No.	Wattage	Lumens	Master Pack
Model No. SP-2	2 W	200	100 Pcs.

Heavy Duty AL body **Heavy Duty** Easy Smooth with Premium Satin finish LED Driver Installation

Specification	
Colour Temperature	6500K/4000K/3000K
	Red/Blue/Green/Pink
Power Factor	>0.95
Surge Protection	2.5KV Surge
Input Voltage	AC 90 - 400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	<15%
Ingress Protection (IP)	IP40













Latest Design Energy Saving **High Brightness**

Life more than 50000 Hrs.



LED SPOT LAMP ADJUSTABLE - COB

Heavy Duty

LED Driver

Easy Smooth

Installation



Model No.	Wattage	Lumens	Cut	Master
			Size	Pack
DL-COB-6	6 W	660	2.5"	20 Pcs.
DL-COB-12	12 W	1320	2.5"	20 Pcs.
DL-COB-18	18 W	1980	3.3"	10 Pcs.
DL-COB-30	30 W	3300	4.5"	10 Pcs.

Specification Colour Temperature 6500K/4000K/3000K **Power Factor** >0.90 Surge Protection 2.5KV Surge AC 90 - 400 V Input Voltage Base Type Recessed > 80 Colour Rendering Index (CRI) Total Harmonic Distortion (THD) <15% IP20 Ingress Protection (IP)















Latest Design Energy Saving **High Brightness**

Life more than 50000 Hrs.

Heavy Duty AL/PC body

with Premium Satin finish





Heavy Duty AL body Heavy Duty Easy Smooth with Premium Satin finish LED Driver Installation

Specification	
Colour Temperature	6500K/4000K/3000K
Power Factor	>0.95
Surge Protection	2.5KV Surge
Input Voltage	AC 90 - 400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	<20%
Ingress Protection (IP)	IP40
Design	Square
















Latest Design | Energy Saving

High Brightness

Life more than 50000 Hrs.

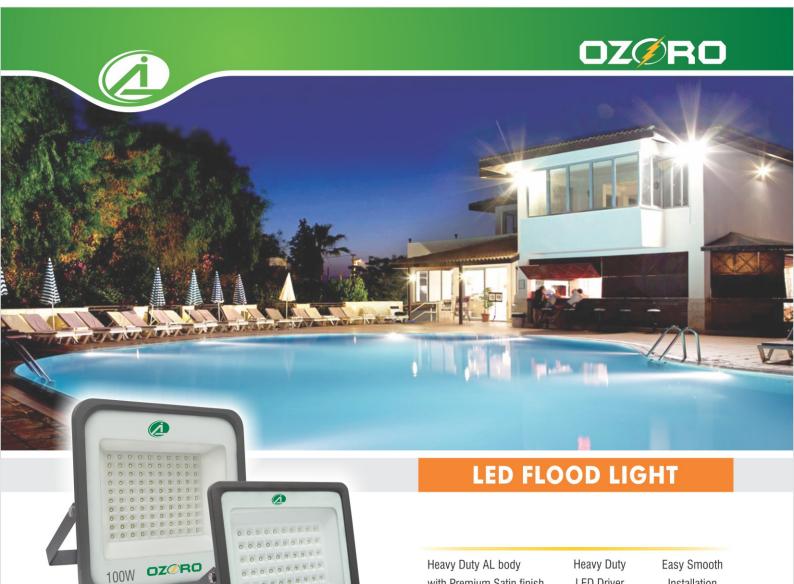

Model No.	Wattage	Lumens
FL-20-SX	20 W	2200
FL-30-SX	30 W	3300
FL-50-SX	50 W	5500
FL-50-RGB	50 W (RGB)	5000
FL-50P-SX	50 W (P)	5500
FL-100-SX	100 W	11000
FL-150-SX	150 W	16500
FL-200-SX	200 W	22000

Specification Colour Temperature 6500K/3000K **Power Factor** >0.95 Surge Protection 5KV Surge Input Voltage AC 90 - 400 V Base Type Hanging Colour Rendering Index (CRI) > 80 Total Harmonic Distortion (THD) <10% Ingress Protection (IP) IP65/IP66 >120° Dispersion Angle

with Premium Satin finish











50W OZORO






LED Driver

Installation

Latest Design Energy Saving **High Brightness**

Life more than 50000 Hrs.



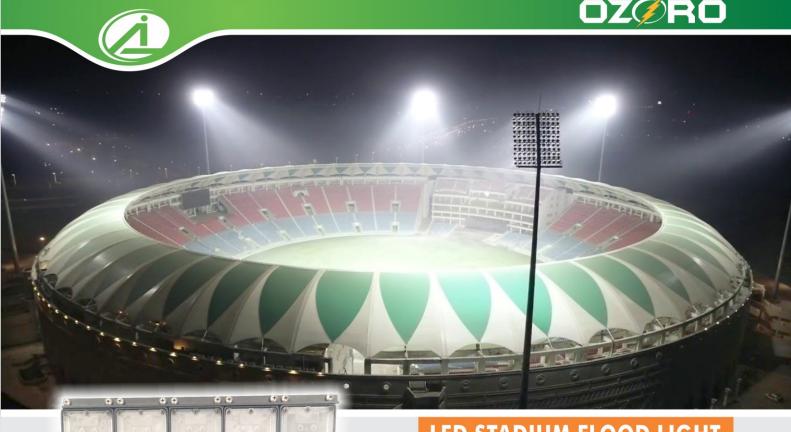

LED STADIUM FLOOD LIGHT

Heavy Duty AL body with Premium Satin finish **Heavy Duty** LED Driver

Easy Smooth Installation

Model No.	Wattage	Lumens
SFL-200	200 W	22000
SFL-300	300 W	33000
SFL-400	400 W	44000

Specification	
Colour Temperature	6500K/3000K
Power Factor	>0.95
Surge Protection	7KV Surge
Input Voltage	AC 90 - 400 V
Base Type	Hanging / Pole Mount
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	<10%
Ingress Protection (IP)	IP67
Dispersion Angle	>120°









Latest Design Energy Saving **High Brightness**

Life more than 50000 Hrs.



Model No.	Wattage	Lumens	
SL-30-SX	30 W	3300	
SL-50-SX	50 W	5500	
SL-100-SX	100 W	11000	

Colour Temperature 6500K/3000K **Power Factor** >0.95 Surge Protection 5KV Surge Input Voltage AC 90 - 400 V Base Type Pole Mount Colour Rendering Index (CRI) > 80 Total Harmonic Distortion (THD) <10% Ingress Protection (IP) IP65/IP66

LED Driver

Installation

with Premium Satin finish

Specification

Dispersion Angle













>120°

Latest Design | Energy Saving

High Brightness

Life more than 50000 Hrs.





Heavy Duty PC body Heavy Duty Easy Smooth with Premium Satin finish LED Driver Installation

Model No.	Wattage	Lumens	LED Numbers	Battery	Solar Panel
SLS-15-SX	15 W	1650	20	3.2V, 5AH	6V, 5W
SLS-30-SX	30 W	3300	40	3.2V,10AH	6V, 10W
SLS-50-SX	50 W	5500	60	3.2V, 15AH	6V, 15W

Specification		
Colour Temperature	6500K	
Base Type	Pole Mount	
Sensor Mathod	A.O. & Sensor	
Charging Time	6-8 Hours by bright Sunlight	
Working Hours	3-5 Days even in rainy days	
Housing Material	ABS FR	
Waterproof	IP65	
Beam Angle	140° * 75°	













Latest Design | Energy Saving

High Brightness

Life more than 50000 Hrs.





LED HI-BAY LIGHT

Heavy Duty AL body Heavy Duty Easy Smooth with Premium Satin finish LED Driver Installation

Model No.	Wattage	Lumens
BL-100-SX	100 W	11000
BL-150-SX	150 W	16500
BL-200-SX	200 W	22000

6500K	
>0.95	
5KV Surge	
AC 90 - 400 V	
Hanging	
> 80	
<10%	
P66	
>120°	







Latest Design | Energy Saving | High Brightness | Life more than 50000 Hrs. | 90% Driver Efficiency





UPCOMING PRODUCTS



HOME AUTOMATION SYSTEM





STRIP LIGHT







UP-DOWN DOWNLIGHTER







4 WAY DOWNLIGHTER







TRACK LIGHT







LED CAN BE REPAIRED





The Lighting Masters will repair your LED whenever it needs. It is a great way to keep it going for years to come. You will be able to have control over the amount of light that is given off as well as the current that is needed.

Get Service in Easy Steps:

- 1. Download
- 2. Register
- 3. Service



HOW TO DO?





Download "The Lighting Master" app from google play store or just scan the QR code shown on light packings. Register yourself by using your contact number and explore more services of lighting masters.



BOOK
YOUR
REQUEST

Book your request using your registered account from your current location and give a description of the problem with the product.



SELECT YOUR DROP POINT

Your nearest Ozoro LED Dealer/Distributor is your drop point. Select your drop point as per your convenience.



GET
YOUR
PROBLEM
SOLVED

The Lighting Masters certified and trained technicians team will serve you accordingly as fast as possible.

NETWORK

DELHI ★ HARYANA ★ UTTAR PRADESH (W) ★ UTTARAKHAND

PUNJAB ★ HIMACHAL PRADESH ★ JAMMU & KASHMIR





ADWIN INNOVATIONS PVT. LTD.

Corp. Office: First Floor, SCO 146, Sec.-17, HUDA, Jagadhri, Distt. Yamuna Nagar - 135003 (Haryana) INDIA

Works: Vill. Daurang, P.O. Damla, Distt. Yamuna Nagar (Haryana) INDIA